Industrial heating cable

HIQ1M / HIQ2M

Alloy 600 Mineral-Insulated Heating Cable

Industrial heating cable

Industrial heating cable **Order-specific design**




Application

Heat tracing for pipes and process equipment. Select supply, heating output, maintain temperature, exposure temperature and circuit protection together.

Typical uses: Oil and gas, Process plants, Marine and offshore

Construction

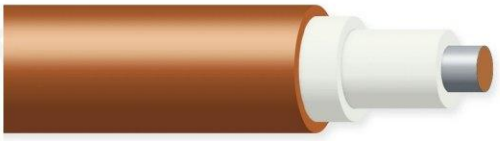

TEBAOFLEX HIQ1M / HIQ2M ALLOY 600 MINERAL-INSULATED HEATING CABLE



Cross-section, not to scale

1	Conductor	Copper or resistance alloy
2	Insulation	Compacted MgO
3	Outer sheath	Nickel alloy

Technical data

Typical values

Service profile	Fixed installation with installation flexing	**Water exposure**	Specify depth, pressure and water chemistry
Chemical compatibility	Verify against the actual fluid and temperature	**Standards**	Order-specific design

Sizes

1 standard constructions

Tick the sizes you need and send this page to info@tebaoflex.com or WhatsApp +86 185 9591 3361.

	Configuration	Rated voltage	Insulation	Outer sheath	Core arrangement
☐	HIQ1M / HIQ2M	–	Compacted MgO	Nickel alloy	Single conductor

– This reference row describes a construction, not an orderable size. Provide the required core count and cross-section with the enquiry.

Standards and approvals

Certifications

Management systems: ISO 9001, ISO 14001, ISO 45001

Request a quotation

Send the size, length and destination. An application engineer replies within 2 business hours.

WhatsApp / phone
+86 185 9591 3361

Email
info@tebaoflex.com

Web
tebaoflex.com/cables/nickel-alloy-mineral-insulated-heating-cable

Typical values for this cable type, based on Order-specific design. Values for your order are confirmed in the quotation. Subject to change without notice. Jiangsu Tebaoflex Special Cable Co., Ltd., Taicang, Jiangsu, China.