Power connection cable

HT-145 MULTI-C

145 °C Cross-Linked Screened Motor Cable

Power connection cable

Power connection cable **Order-specific design**




Application

Power connection for submerged pumps and water-handling equipment. Select insulation, sheath and cable entry for the actual liquid and installation.

Typical uses: Water and wastewater, Agriculture, Industrial pumping

Construction

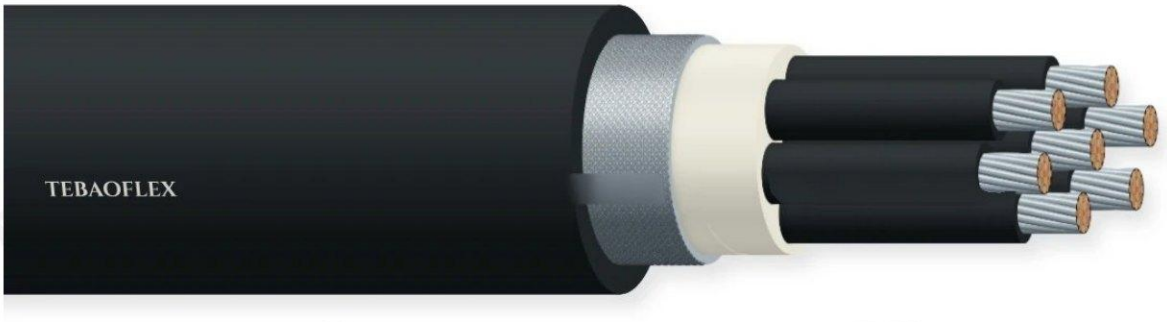



Cross-section, not to scale

1	Conductor	Stranded copper
2	Insulation	Cross-linked polyolefin
3	Outer sheath	Cross-linked polyolefin

Technical data

Typical values

Rated voltage	300/500 V	Maximum conductor temperature	+145 °C
Service profile	Fixed installation with installation flexing	Water exposure	Specify depth, pressure and water chemistry
Chemical compatibility	Verify against the actual fluid and temperature	Standards	Order-specific design

Sizes

1 standard constructions

Tick the sizes you need and send this page to info@tebaoflex.com or WhatsApp +86 185 9591 3361.

	Configuration	Rated voltage	Insulation	Outer sheath	Core arrangement
☐	HT-145 MULTI-C	300/500 V	Cross-linked polyolefin	Cross-linked polyolefin	Core count to order

– This reference row describes a construction, not an orderable size. Provide the required core count and cross-section with the enquiry.

Standards and approvals

Certifications

Management systems: ISO 9001, ISO 14001, ISO 45001

Request a quotation

Send the size, length and destination. An application engineer replies within 2 business hours.

WhatsApp / phone
+86 185 9591 3361

Email
info@tebaoflex.com

Web
tebaoflex.com/cables/145-c-cross-linked-pump-motor-cable

Typical values for this cable type, based on Order-specific design. Values for your order are confirmed in the quotation. Subject to change without notice. Jiangsu Tebaoflex Special Cable Co., Ltd., Taicang, Jiangsu, China.