Submersible pump cable

(N)TSW

3.6/6 kV Screened Submersible Water Pump Cable

Submersible pump cable

Submersible pump cable **Order-specific design**





Application

Power connection for submerged pumps and water-handling equipment. Select insulation, sheath and cable entry for the actual liquid and installation.

Typical uses: Water and wastewater, Agriculture, Industrial pumping

Construction

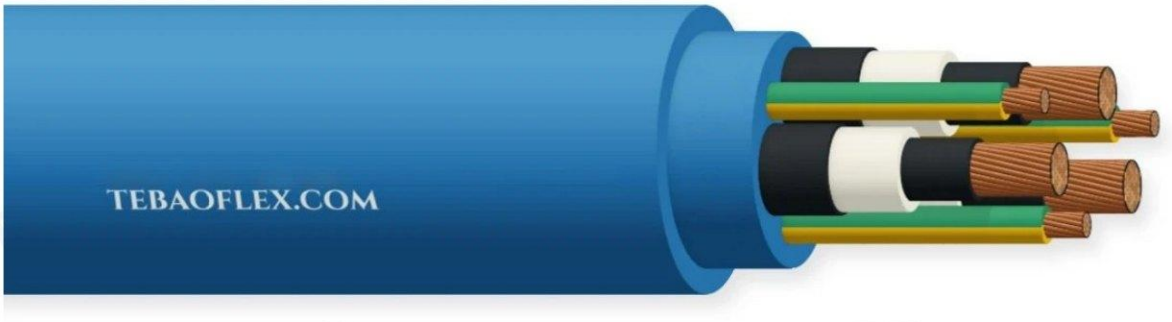



Cross-section, not to scale

1	Conductor	Stranded copper
2	Insulation	EPR
3	Outer sheath	Water-service elastomer

Technical data

Typical values

Rated voltage	3.6/6 kV	Service profile	Fixed installation with installation flexing
Water exposure	Specify depth, pressure and water chemistry	Chemical compatibility	Verify against the actual fluid and temperature
Standards	3.6/6 kV		

Sizes

1 standard constructions

Tick the sizes you need and send this page to info@tebaoflex.com or WhatsApp +86 185 9591 3361.

	Configuration	Rated voltage	Insulation	Outer sheath	Core arrangement
☐	(N)TSW	3.6/6 kV	EPR	Water-service elastomer	Three-phase cores

– This reference row describes a construction, not an orderable size. Provide the required core count and cross-section with the enquiry.

Standards and approvals

Certifications

Management systems: ISO 9001, ISO 14001, ISO 45001

Request a quotation

Send the size, length and destination. An application engineer replies within 2 business hours.

WhatsApp / phone
+86 185 9591 3361

Email
info@tebaoflex.com

Web
tebaoflex.com/cables/3-6-6-kv-screened-clean-water-pump-cable

Typical values for this cable type, based on 3.6/6 kV. Values for your order are confirmed in the quotation. Subject to change without notice. Jiangsu Tebaoflex Special Cable Co., Ltd., Taicang, Jiangsu, China.