UL AWM Style 2570 SERVO 7DSL Hybrid

SERVO 7DSL Hybrid

Low-Capacitance Servo Motor + Hiperface DSL Single-Cable Hybrid

UL AWM Style 2570 / VDE 0250 · 600/1000 V · −40…+80 °C industrial SERVO 7DSL Hybrid




UL AWM Style 2570 / VDE 0250 | **600/1000 V** | **−40…+80 °C**


Application

Low-Capacitance Servo Motor + Hiperface DSL Single-Cable Hybrid Cable engineered to UL AWM Style 2570 / VDE 0250 for 600/1000 V service across −40…+80 °C, featuring stranded copper conductor and pvc outer sheath with minimum bending radius 6 × OD.

Typical uses: Automated Assembly & Packaging Lines, CNC Machine Tools & Robotics, PLC/DCS Control & Marshalling Cabinets, Industrial Drives & Motor Manufacturing, Closed-Loop Servo Drives & Linear Actuators

Construction

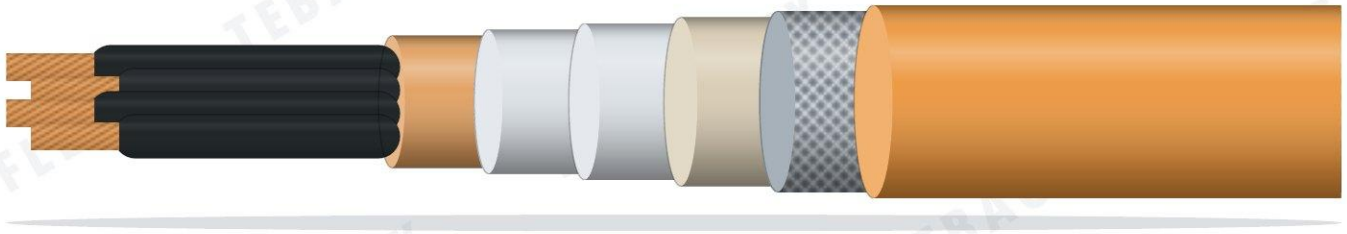



Cross-section, not to scale

1	Stranded copper conductor	UL AWM Style 2570 / VDE 0250
2	PP core insulation	UL AWM Style 2570 / VDE 0250
3	Signal fleece wrapping	UL AWM Style 2570 / VDE 0250
4	Signal tinned copper braid	UL AWM Style 2570 / VDE 0250
5	Al-metallized textile tape	UL AWM Style 2570 / VDE 0250
6	Double polyester signal overwrap	UL AWM Style 2570 / VDE 0250
7	Soft fleece overall wrap	UL AWM Style 2570 / VDE 0250
8	Overall tinned copper braid	UL AWM Style 2570 / VDE 0250
9	PVC outer sheath	UL AWM Style 2570 / VDE 0250

Technical data

Typical values

Rated voltage / duty	600/1000 V (UL AWM Style 2570 / VDE 0250)	**Conductor construction**	Stranded copper conductor — High-conductivity copper conductor per UL AWM Style 2570 / VDE 0250
Primary insulation / dielectric	PP core insulation — Extruded PP dielectric (individual core / group layer)	**Continuous operating temperature**	−40…+80 °C per UL AWM Style 2570 / VDE 0250
Short-circuit / peak thermal limit	+160 °C to +250 °C (5 s adiabatic limit depending on dielectric class)	**Minimum installation temperature**	−5 °C (thermoplastic) / −25 °C (cross-linked or elastomer) / −40 °C (metallic)
Outer protection / covering	PVC outer sheath — Extruded PVC outer sheath protective layer (continuous layer)	**Minimum bending radius**	6 × OD (installed / static routing)
Layer count & geometry	9 concentric/structural layers verified by cross-section inspection	**Environmental & chemical durability**	Engineered for industrial service in accordance with UL AWM Style 2570 / VDE 0250
RoHS & REACH compliance	RoHS 2 (2011/65/EU + 2015/863) & REACH SVHC compliant	**Standards**	UL AWM Style 2570 / VDE 0250

Sizes

12 standard constructions

Tick the sizes you need and send this page to info@tebaoflex.com or WhatsApp +86 185 9591 3361.

Order designation	Configuration	Outer Ø ≈ mm	Weight ≈ kg/km	Min. bend R fixed mm
SERVO 7DSL Hybrid Standard Production Schedule (600/1000 V · −40…+80 °C) 12 sizes				
☐ **SERVO 7DSL Hybrid 3G1.5**	**3 × 1.5 mm²**	**8.4**	**105**	**68**
☐ **SERVO 7DSL Hybrid 4G1.5**	**4 × 1.5 mm²**	**9.2**	**128**	**74**
☐ **SERVO 7DSL Hybrid 5G1.5**	**5 × 1.5 mm²**	**10.1**	**156**	**81**
☐ **SERVO 7DSL Hybrid 3G2.5**	**3 × 2.5 mm²**	**9.8**	**148**	**78**
☐ **SERVO 7DSL Hybrid 4G2.5**	**4 × 2.5 mm²**	**10.8**	**186**	**86**
☐ **SERVO 7DSL Hybrid 5G2.5**	**5 × 2.5 mm²**	**11.9**	**228**	**95**
☐ **SERVO 7DSL Hybrid 4G4**	**4 × 4.0 mm²**	**12.6**	**268**	**101**
☐ **SERVO 7DSL Hybrid 4G6**	**4 × 6.0 mm²**	**14.2**	**365**	**114**
☐ **SERVO 7DSL Hybrid 4G10**	**4 × 10 mm²**	**17.5**	**580**	**140**
☐ **SERVO 7DSL Hybrid 4G16**	**4 × 16 mm²**	**20.4**	**845**	**163**
☐ **SERVO 7DSL Hybrid 4G25**	**4 × 25 mm²**	**24.8**	**1,290**	**198**
☐ **SERVO 7DSL Hybrid 4G35**	**4 × 35 mm²**	**27.9**	**1,710**	**223**

– Single-core and multi-core sizes from 0.5 mm² up to 630 mm² (or AWG/kcmil) available per UL AWM Style 2570 / VDE 0250.

Conductor resistance & current-carrying capacity

8 sizes

Cross-section	Max. DC R_{20} Ω/km	Current in air A (30 °C) ≈	Voltage drop mV/A-m
1.5 mm² (AWG 16)	**13.30**	**18**	**29.0**
2.5 mm² (AWG 14)	**7.98**	**26**	**17.5**
4.0 mm² (AWG 12)	**4.95**	**34**	**10.9**
6.0 mm² (AWG 10)	**3.30**	**44**	**7.3**
10 mm² (AWG 8)	**1.91**	**61**	**4.2**
16 mm² (AWG 6)	**1.21**	**82**	**2.7**
25 mm² (AWG 4)	**0.78**	**108**	**1.7**
35 mm² (AWG 2)	**0.55**	**135**	**1.2**

– Current ratings are for 3 loaded conductors at 30 °C ambient in free air/tray per IEC 60364-5-52 / NEC.

Standards and approvals

- UL AWM Style 2570 Compliant
- EN 10204 3.1 Routine Test Certificate
- CE, RoHS 2 (2011/65/EU) & REACH

Certifications

Management systems: ISO 9001, ISO 14001, ISO 45001

Request a quotation

Send the size, length and destination. An application engineer replies within 2 business hours.

WhatsApp / phone
+86 185 9591 3361

Email
info@tebaoflex.com

Web
tebaoflex.com/cables/servo-7dsl-hybrid-hiperface-dsl-single-cable-servo-cable

Typical values for this cable type, based on UL AWM Style 2570 / VDE 0250. Values for your order are confirmed in the quotation. Subject to change without notice. Jiangsu Tebaoflex Special Cable Co., Ltd., Taicang, Jiangsu, China.