Submersible pump cable

UL 44 XHHW-2

Heavy-Duty Borehole Well Pump Cable

Submersible pump cable

Submersible pump cable **Order-specific design**




Application

Power connection for submerged pumps and water-handling equipment. Select insulation, sheath and cable entry for the actual liquid and installation.

Typical uses: Water and wastewater, Agriculture, Industrial pumping

Construction

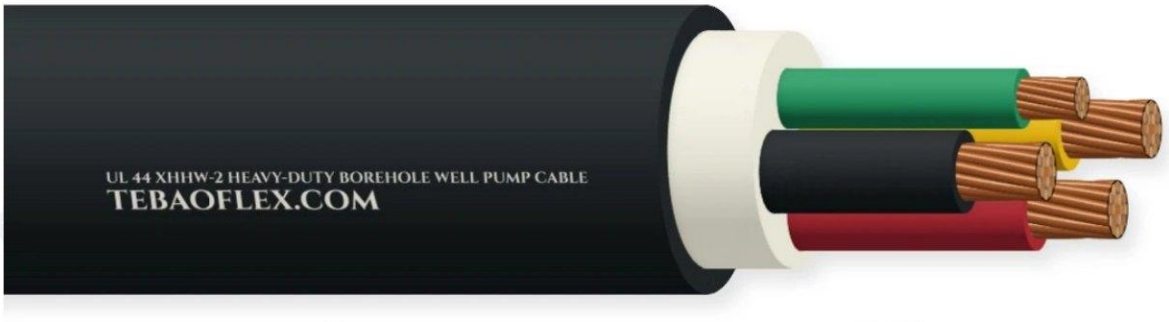



Cross-section, not to scale

1	Conductor	Stranded copper
2	Insulation	XLPE
3	Outer sheath	Application-specific polymer

Technical data

Typical values

Rated voltage	600 V	Maximum conductor temperature	+90 °C
Service profile	Fixed installation with installation flexing	Water exposure	Specify depth, pressure and water chemistry
Chemical compatibility	Verify against the actual fluid and temperature	Standards	UL 44

Sizes

1 standard constructions

Tick the sizes you need and send this page to info@tebaoflex.com or WhatsApp +86 185 9591 3361.

	Configuration	Rated voltage	Insulation	Outer sheath	Core arrangement
☐	UL 44 XHHW-2	600 V	XLPE	Application-specific polymer	Core count to order

– This reference row describes a construction, not an orderable size. Provide the required core count and cross-section with the enquiry.

Standards and approvals

Certifications

Management systems: ISO 9001, ISO 14001, ISO 45001

Request a quotation

Send the size, length and destination. An application engineer replies within 2 business hours.

WhatsApp / phone
+86 185 9591 3361

Email
info@tebaoflex.com

Web
tebaoflex.com/cables/xhhw-2-heavy-duty-borehole-pump-cable

Typical values for this cable type, based on UL 44. Values for your order are confirmed in the quotation. Subject to change without notice. Jiangsu Tebaoflex Special Cable Co., Ltd., Taicang, Jiangsu, China.